


3-Port Non-vented

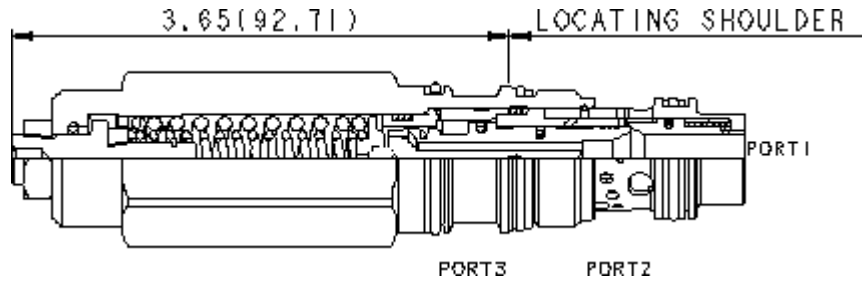

Load reactive, load control valves with pilot assist combine two valves; a check valve and a relief valve. The check valve allows free flow from the directional valve (port 2) to the load (port 1) while a direct-acting, pilot-assisted relief valve controls flow from port 1 to port 2. Pilot assist at port 3 lowers the effective setting of the relief valve at a rate determined by the pilot ratio.

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	5000 psi
Pilot Ratio	4.5:1
Maximum Recommended Load Pressure	See Technical Features
Adjustment - No. of CCW Turns from Min. to Max. Setting	9
Check Cracking Pressure	25 psi
Factory Pressure Settings Established at	2 in <sup>3</sup> /min.
Maximum Valve Leakage at Reseat	5 drops/min.
Reseat	≥77% of setting
Locknut Hex Size	9/16 in.
Locknut Torque	80 - 90 lbf in.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

**CONFIGURATION OPTIONS**

**Model Code Example: MBEGLHN**

CONTROL (L)

**L** Standard Screw Adjustment

FUNCTIONAL SETTING RANGE (H)

**H** 1000 - 4000 psi (70 - 280 bar), 3000 psi (210 bar) Standard Setting

**J** 2000 - 5000 psi (140 - 350 bar), 3000 psi (210 bar) Standard Setting

SEAL MATERIAL (N)

**N** Buna-N

**V** Viton

MATERIAL/COATING

**Standard Material/Coating**

**/AP** Stainless Steel, Passivated

**/LH** Mild Steel, Zinc-Nickel