

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-11A
Series	1
Capacity	60 L/min.
Pilot Ratio	10:1
Maximum Recommended Load Pressure at Maximum Setting	320 bar
Maximum Setting	420 bar
Adjustment - No. of CCW Turns from Min. to Max. Setting	5
Check Cracking Pressure	2,8 bar
Factory Pressure Settings Established at	30 cc/min.
Maximum Valve Leakage at Reseat	0,3 cc/min.
Operating Characteristic	Standard
Pilot Configuration	Sealed
Reseat	>85% of setting
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Adjustment Screw Internal Hex Size	4 mm
Locknut Hex Size	15 mm
Locknut Torque	9 - 10 Nm
Model Weight	0,20 kg
Seal kit - Cartridge	Buna: 990-211-007
Seal kit - Cartridge	Viton: 990-211-006

## OPTION SELECTION EXAMPLE: CACHLNV

**CONTROL**

- L** Standard Screw Adjustment
- C** Tamper Resistant - Factory Set

**(L) SEAL MATERIAL**


- N** Buna-N
- V** Viton

**(N) MATERIAL/COATING**

- Standard Material/Coating**
- /AP** Stainless Steel, Passivated
- /LH** Mild Steel, Zinc-Nickel

**PERFORMANCE CURVES**

**Free Flow and Piloted Open Pressure Drop**

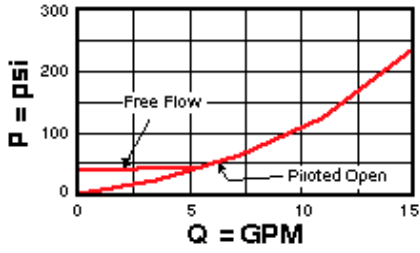

**Free Flow and Piloted Open Pressure Drop**

