




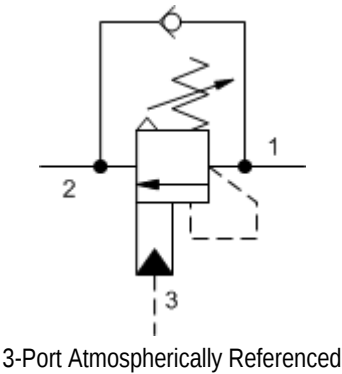

3-Port Atmospherically Referenced



3-Port Atmospherically Referenced, Non-adjustable

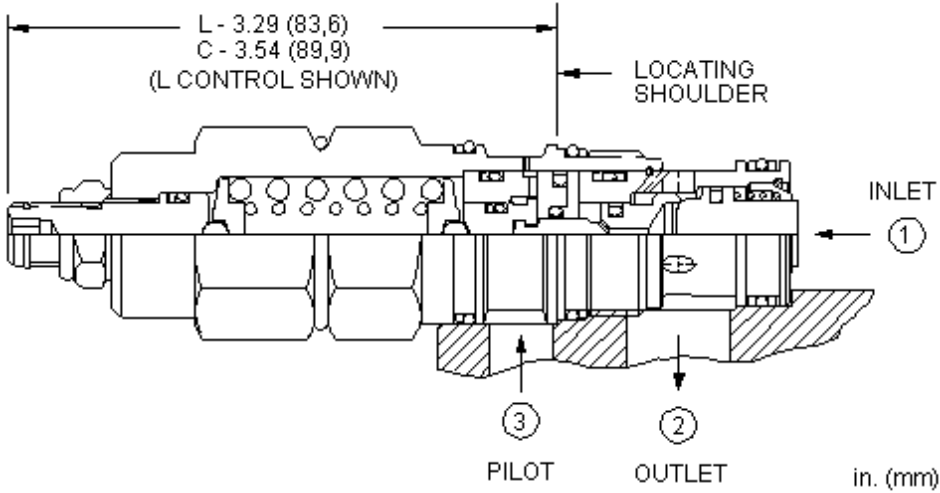

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Seal kit - Cartridge	Buna: 990-302-007
Seal kit - Cartridge	Viton: 990-302-006

CONFIGURATION OPTIONS

Model Code Example: CAEALHNV

CONTROL	(L)	FUNCTIONAL SETTING RANGE	(H)	SEAL MATERIAL	(N)	MATERIAL/COATING
L	Standard Screw Adjustment	H	1000 - 4000 psi (70 - 280 bar), 3000 psi (210 bar) Standard Setting	N	Buna-N	Standard Material/Coating
C	Tamper Resistant - Factory Set	I	400 - 1500 psi (28 - 105 bar), 1000 psi (70 bar) Standard Setting	V	Viton	/AP Stainless Steel, Passivated /LH Mild Steel, Zinc-Nickel