

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-2A
	2
	120 L/min.
	5:1
	320 bar
	420 bar
	1,7 bar
	0,3 cc/min.
	30 cc/min.
	5
	>85% of setting
	28,6 mm
	61 - 68 Nm
	4 mm
	15 mm
	9 - 10 Nm
	0,30 kg
Seal kit - Cartridge	Buna: 990-302-007
Seal kit - Cartridge	Viton: 990-302-006

# OPTION SELECTION EXAMPLE: CAEGLGNV


	(L)	(G)	(N)	MATERIAL/COATING
<b>L</b>	<b>G</b>	<b>N</b>	Standard Material/Coating	
<b>C</b> -	<b>F</b> 2000 - 6000 psi (140 - 420 bar), 4000 psi (280 bar)	<b>V</b>	/LH -	
	<b>F</b> 1000 - 2500 psi (70 - 175 bar), 2000 psi (140 bar)			

## TECHNICAL FEATURES

- 1.3
- 
- 200psi 14bar
- 4000 1 0.07cc
- 85%
- Sun
- 
- 
- 3
- 3
- Sun

## PERFORMANCE CURVES

**Free Flow and Piloted Open Pressure Drop**

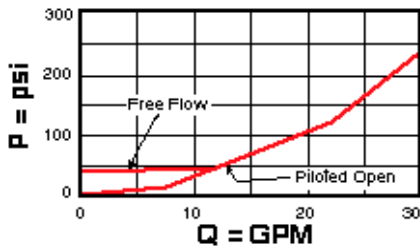

**Free Flow and Piloted Open Pressure Drop**

