



3-Port Atmospherically Referenced



3-Port Atmospherically Referenced, Non-adjustable

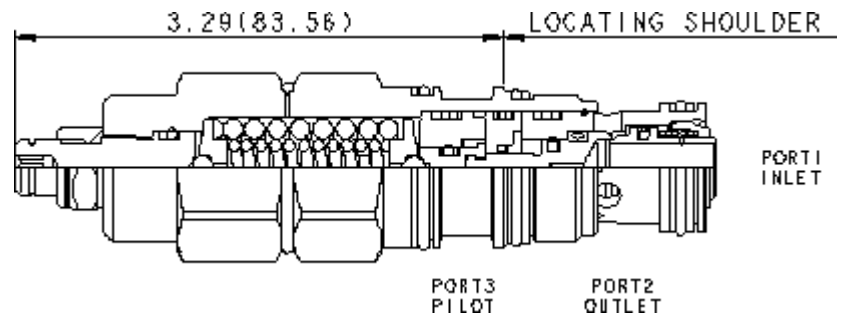

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-2A
Series	2
Capacity	120 L/min.
Pilot Ratio	1:1
Maximum Recommended Load Pressure at Maximum Setting	215 bar
Maximum Setting	280 bar
Adjustment - No. of CCW Turns from Min. to Max. Setting	5
Check Cracking Pressure	1,7 bar
Factory Pressure Settings Established at	30 cc/min.
Maximum Valve Leakage at Reseat	0,3 cc/min.
Operating Characteristic	estándar
Reseat	>85% of setting
Valve Hex Size	28,6 mm
Valve Installation Torque	61 - 68 Nm
Adjustment Screw Internal Hex Size	4 mm
Locknut Hex Size	15 mm
Locknut Torque	9 - 10 Nm
Model Weight	0.38 kg.
Seal kit - Cartridge	Buna: 990-302-007
Seal kit - Cartridge	Viton: 990-302-006
Seal kit - Cartridge	Buna: 990-302-007
Seal kit - Cartridge	Viton: 990-302-006

# OPTION SELECTION EXAMPLE: CAEKLHN

**CONTROL**

- L** Standard Screw Adjustment
- C** Tamper Resistant - Factory Set

**(L) FUNCTIONAL SETTING RANGE**

- H** 1000 - 4000 psi (70 - 280 bar), 3000 psi (210 bar)  
Standard Setting
- I** 400 - 1500 psi (28 - 105 bar), 1000 psi (70 bar)  
Standard Setting


**(H) SEAL MATERIAL**

- N** Buna-N
- V** Viton

**(N)**

**PERFORMANCE CURVES**

**Free Flow and Piloted Open Pressure Drop**

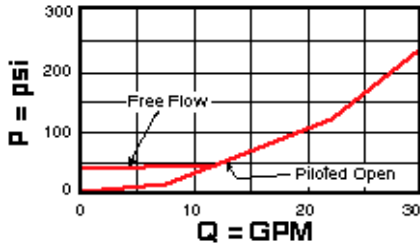

**Free Flow and Piloted Open Pressure Drop**

