

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-17A
	3
	240 L/min.
	5:1
	320 bar
	420 bar
	1,7 bar
	0,3 cc/min.
	30 cc/min.
	-
	5
	>85% of setting
	31,8 mm
	203 - 217 Nm
	4 mm
	15 mm
	9 - 10 Nm
	0,70 kg
Seal kit - Cartridge	Buna: 990-117-007
Seal kit - Cartridge	Polyurethane: 990-117-002
Seal kit - Cartridge	Viton: 990-117-006

# OPTION SELECTION EXAMPLE: CAGGLGNV


	(L)	(G)	(N)	MATERIAL/COATING
<b>L</b>	<b>G</b>	<b>N</b>	<b>V</b>	Standard Material/Coating
<b>C</b> -	<b>F</b> 1000 - 2500 psi (70 - 175 bar), 2000 psi (140 bar)			/AP

## TECHNICAL FEATURES

- 1.3
- 
- 200psi 14bar
- 4000 1 0.07cc
- 85%
- Sun
- 
- 
- 3
- 3
- Sun

## PERFORMANCE CURVES

**Free Flow and Piloted Open Pressure Drop**

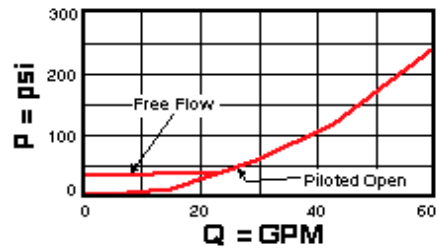

**Free Flow and Piloted Open Pressure Drop**

