


3-Port Non-vented, Fixed Setting

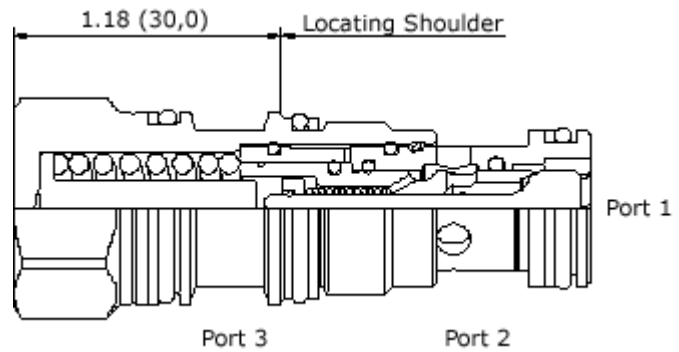

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

| | |
|--|---------------------------|
| cavidad | T-11A |
| Series | 1 |
| Capacity | 10 L/min. |
| Pilot Ratio | 1.5:1 |
| Maximum Recommended Load Pressure | See Technical Features |
| Check Cracking Pressure | 1,7 bar |
| Factory Pressure Settings Established at | 30 cc/min. |
| Maximum Valve Leakage at Reseat | 0,3 cc/min. |
| Operating Characteristic | ultra-restrictiva |
| Pilot Configuration | Sealed |
| Valve Hex Size | 22,2 mm |
| Valve Installation Torque | 41 - 47 Nm |
| Model Weight | 0.12 kg. |
| Seal kit - Cartridge | Buna: 990-011-007 |
| Seal kit - Cartridge | Polyurethane: 990-011-002 |
| Seal kit - Cartridge | Viton: 990-011-006 |
| Seal kit - Cartridge | Buna: 990-011-007 |
| Seal kit - Cartridge | Polyurethane: 990-011-002 |
| Seal kit - Cartridge | Viton: 990-011-006 |

OPTION SELECTION EXAMPLE: CBABXNN

FIXED PRESSURE RANGE

(N)

SEAL MATERIAL

(N)

MATERIAL/COATING

N 2900 - 3500 psi (200 - 245 bar)

N Buna-N

Standard Material/Coating

P 2250 - 2680 psi (155 - 185 bar)

E EPDM

/LH Mild Steel, Zinc-Nickel

V Viton

PERFORMANCE CURVES

