


3-Port Non-vented, Fixed Setting

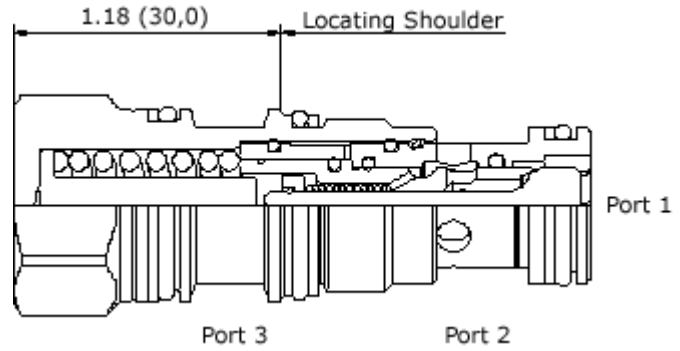

3

2

1

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-11A
	1
	10 L/min.
	4.5:1
	See Technical Features
	Sealed
	1,7 bar
	0,3 cc/min.
	30 cc/min.
	22,2 mm
	41 - 47 Nm
	0.12 kg.
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

OPTION SELECTION EXAMPLE: CBAGXMN

(M)

(N)

MATERIAL/COATING

M 4700 - 5600 psi (325 - 390 bar)

N

Standard Material/Coating

V 3200 - 3800 psi (220 - 260 bar)

V

/LH -

X 3500 - 4200 psi (245 - 290 bar)

Z 4125 - 4900 psi (285 - 340 bar)

TECHNICAL FEATURES

-
- M 3600psi 250bar M 5600psi 390bar
- V 2450psi 170bar V 3800psi 260bar
- X 2700psi 190bar X 4200psi 290bar
- Z 3170psi 220bar Z 4900psi 340bar
- “ ”
-
-
-
-
-
-
- 2 1+ x
- 3
- Sun

±50psi 3.5bar

PERFORMANCE CURVES

