




## CONFIGURATION

<b>M</b>	Fixed Pressure Range	4700 - 5600 psi (325 - 390 bar)
<b>N</b>	Seal Material	Buna-N
	Material/Coating	

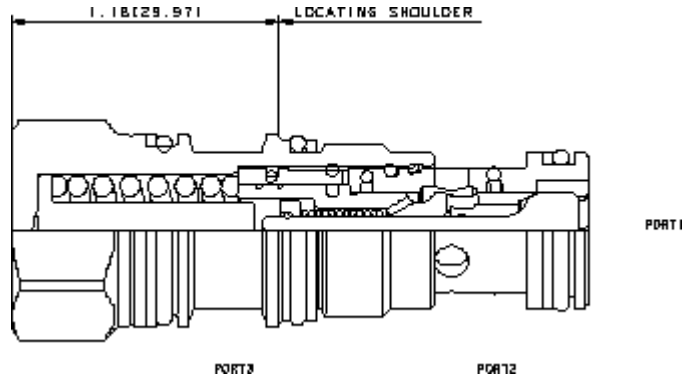

## TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-11A
Series	1
Capacity	40 L/min.
Pilot Ratio	4.5:1
Maximum Recommended Load Pressure	See Technical Features
Check Cracking Pressure	1,7 bar
Factory Pressure Settings Established at	30 cc/min.
Maximum Valve Leakage at Reseat	0,3 cc/min.
Operating Characteristic	Semi-restrictive
Pilot Configuration	Sealed
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Model Weight	0.12 kg.
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	EPDM: 990-011-014
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

## OPTION SELECTION EXAMPLE: CBBDXMN

**FIXED PRESSURE RANGE**

(M)

**SEAL MATERIAL**

(N)

**MATERIAL/COATING**

- M** 4700 - 5600 psi (325 - 390 bar)
- V** 3200 - 3800 psi (220 - 260 bar)
- X** 3500 - 4200 psi (245 - 290 bar)
- Z** 4125 - 4900 psi (285 - 340 bar)

- N** Buna-N
- E** EPDM
- V** Viton

- Standard Material/Coating**
- /AP** Stainless Steel, Passivated

### PERFORMANCE CURVES

