
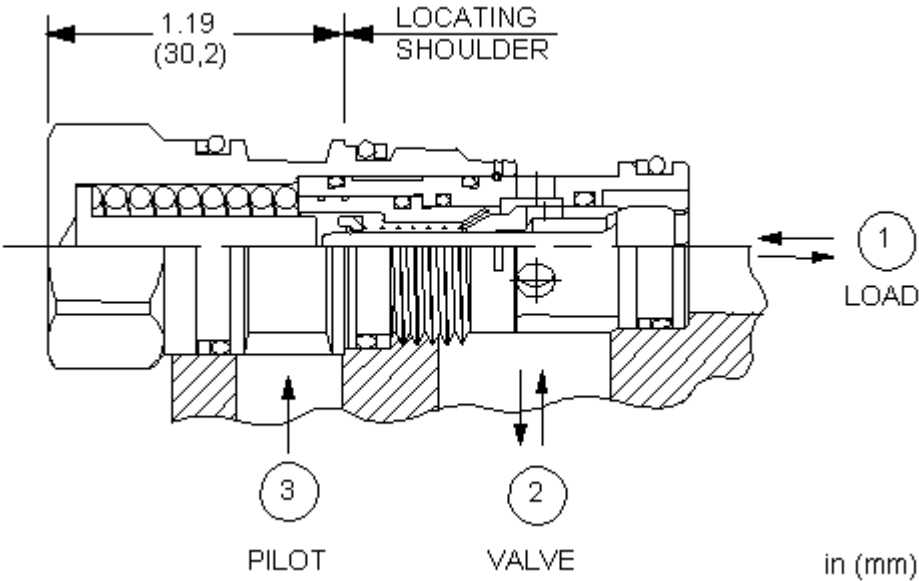


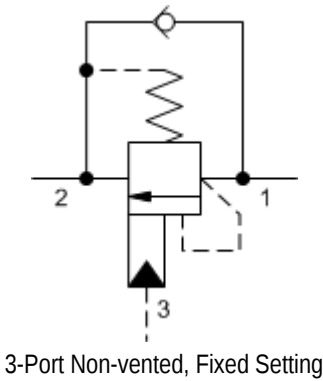

3

2

1

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-11A
	1
	40 L/min.
	4.5:1
	See Technical Features
	Sealed
	1,7 bar
	0,3 cc/min.
	30 cc/min.
	22,2 mm
	41 - 47 Nm
	0.12 kg.
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	EPDM: 990-011-014
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	EPDM: 990-011-014
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

OPTION SELECTION EXAMPLE: CBBDXMN

(M)		(N)	MATERIAL/COATING
M	4700 - 5600 psi (325 - 390 bar)	N	Standard Material/Coating
V	3200 - 3800 psi (220 - 260 bar)	E	EPDM
X	3500 - 4200 psi (245 - 290 bar)	V	/AP
Z	4125 - 4900 psi (285 - 340 bar)		

TECHNICAL FEATURES

- M 3600psi 250bar M 5600psi 390bar
- V 2450psi 170bar V 3800psi 260bar
- X 2700psi 190bar X 4200psi 290bar
- Z 3170psi 220bar Z 4900psi 340bar
- “ ”
- ±50psi 3.5bar
- EPDM
- 3
- 2 1+ x
- Sun

PERFORMANCE CURVES

