

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-11A
	1
	20 L/min.
	2:1
	215 bar
	280 bar
	0,3 cc/min.
	30 cc/min.
	3.75
	>85% of setting
	22,2 mm
	41 - 47 Nm
	4 mm
	15 mm
	9 - 10 Nm
	0,20 kg
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

OPTION SELECTION EXAMPLE: CBBYLHNV


	(L)	(H)	(N)	MATERIAL/COATING
L	H	H	N	Standard Material/Coating
C	C	A	V	/AP
		B		/LH
		I		

TECHNICAL FEATURES

- 1.3
-
-
-
- 200psi 14bar
- 2 1+ x
- 85%
- Sun
-
- 4psi 0.3bar
- 1000psi 2,3 40in³/min 0.7L/min 70bar
- 3
- "/AP"
- Sun

PERFORMANCE CURVES

Free Flow and Piloted Open Pressure Drop

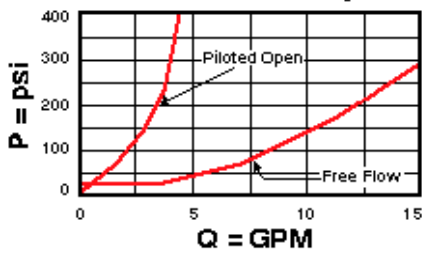

Free Flow and Piloted Open Pressure Drop

