

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-11A
	1
	20 L/min.
	2:1
	See Technical Features
	1,7 bar
	0,3 cc/min.
	30 cc/min.
	22,2 mm
	41 - 47 Nm
	0.12 kg.
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

OPTION SELECTION EXAMPLE: CBBYXNN

(N)

(N)

MATERIAL/COATING

N 2900 - 3500 psi (200 - 245 bar)
P 2250 - 2680 psi (155 - 185 bar)

N
V


Standard Material/Coating
/LH -

TECHNICAL FEATURES

- - N 2200psi 150bar N 3500psi 245bar
 - P 1700psi 120bar P 1680psi 185bar
 - “ ”
 -
 -
 -
 -
 - 1000psi 2,3 40in³/min 0.7L/min 70bar
 - 2 1+ x
 - 3
 - Sun
- ±50psi 3.5bar

PERFORMANCE CURVES

Free Flow and Piloted Open Pressure Drop

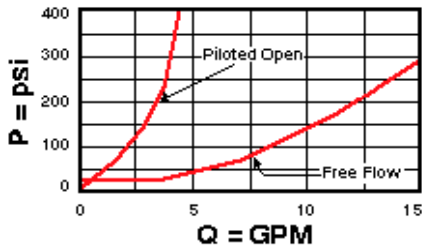

Free Flow and Piloted Open Pressure Drop

