

3

2

1

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-2A
	2
	80 L/min.
	1.5:1
	215 bar
	280 bar
	0,3 cc/min.
	30 cc/min.
	>85% of setting
	28,6 mm
	61 - 68 Nm
	0.23 kg.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

# OPTION SELECTION EXAMPLE: CBDBXNN

(N)

(N)

MATERIAL/COATING

N 2900 - 3500 psi (200 - 245 bar)

N

Standard Material/Coating

P 2250 - 2680 psi (155 - 185 bar)

V

/LH

-


## TECHNICAL FEATURES

- N 2200psi 150bar N 3500psi 245bar
- P 1700psi 120bar P 1680psi 185bar
- “ ”
- 
- 
- 
- 3
- 
- 2 1+ x
- Sun

±50psi 3.5bar

## PERFORMANCE CURVES

**Free Flow and Piloted Open Pressure Drop**

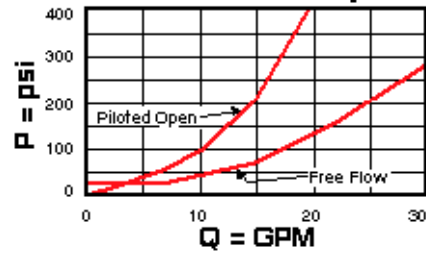

**Free Flow and Piloted Open Pressure Drop**

