

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-2A
Series	2
Capacity	80 L/min.
Pilot Ratio	3:1
Maximum Recommended Load Pressure at Maximum Setting	215 bar
Maximum Setting	280 bar
Factory Pressure Settings Established at	30 cc/min.
Maximum Valve Leakage at Reseat	0,3 cc/min.
Operating Characteristic	semi-restrictiva
Reseat	>85% of setting
Valve Hex Size	28,6 mm
Valve Installation Torque	61 - 68 Nm
Model Weight	0.23 kg.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

# OPTION SELECTION EXAMPLE: CBDCXNN

## FIXED PRESSURE RANGE

N 2900 - 3500 psi (200 - 245 bar)

P 2250 - 2680 psi (155 - 185 bar)

## (N) SEAL MATERIAL

N Buna-N

E EPDM

V Viton


## (N) MATERIAL/COATING

Standard Material/Coating

/LH Mild Steel, Zinc-Nickel

## PERFORMANCE CURVES

### Free Flow and Piloted Open Pressure Drop

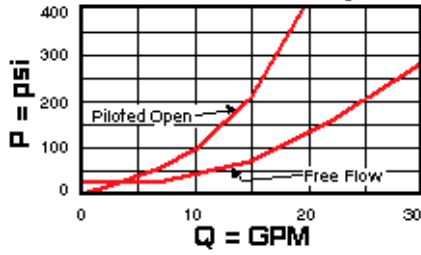

### Free Flow and Piloted Open Pressure Drop

