

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-2A
	2
	80 L/min.
	3:1
	215 bar
	280 bar
	0,3 cc/min.
	30 cc/min.
	>85% of setting
	28,6 mm
	61 - 68 Nm
	0.23 kg.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

OPTION SELECTION EXAMPLE: CBDCXNN

(N)

(N)

MATERIAL/COATING

N 2900 - 3500 psi (200 - 245 bar)
 P 2250 - 2680 psi (155 - 185 bar)

N
 E EPDM
 V


Standard Material/Coating
 /LH -

TECHNICAL FEATURES

- N 2200psi 150bar N 3500psi 245bar
 - P 1700psi 120bar P 1680psi 185bar
 - “ ”
 -
 -
 -
 -
 - 3
 -
 - 2 1+ x
 - Sun
- ±50psi 3.5bar

PERFORMANCE CURVES

Free Flow and Piloted Open Pressure Drop

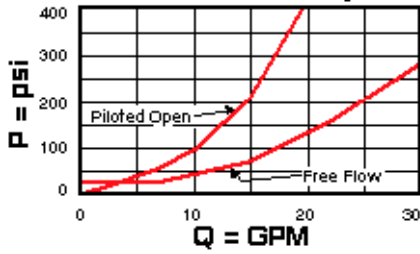

Free Flow and Piloted Open Pressure Drop

