

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-2A
Series	2
Capacity	80 L/min.
Pilot Ratio	4.5:1
Maximum Recommended Load Pressure	See Technical Features
Factory Pressure Settings Established at	30 cc/min.
Maximum Valve Leakage at Reseat	0,3 cc/min.
Operating Characteristic	estándar
Pilot Configuration	estándar
Reseat	>85% of setting
Valve Hex Size	28,6 mm
Valve Installation Torque	61 - 68 Nm
Model Weight	0.23 kg.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

## OPTION SELECTION EXAMPLE: CBDDXMN

**FIXED PRESSURE RANGE**

- M** 4700 - 5600 psi (325 - 390 bar)
- V** 3200 - 3800 psi (220 - 260 bar)
- X** 3500 - 4200 psi (245 - 290 bar)
- Z** 4125 - 4900 psi (285 - 340 bar)

**(M) SEAL MATERIAL**


- N** Buna-N
- V** Viton

**(N) MATERIAL/COATING**

- Standard Material/Coating
- /LH** Mild Steel, Zinc-Nickel

### PERFORMANCE CURVES

**Free Flow and Piloted Open Pressure Drop**

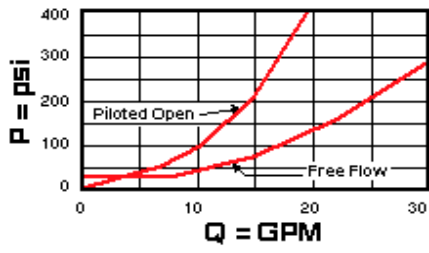

**Free Flow and Piloted Open Pressure Drop**

