


3-Port Non-vented, Fixed Setting

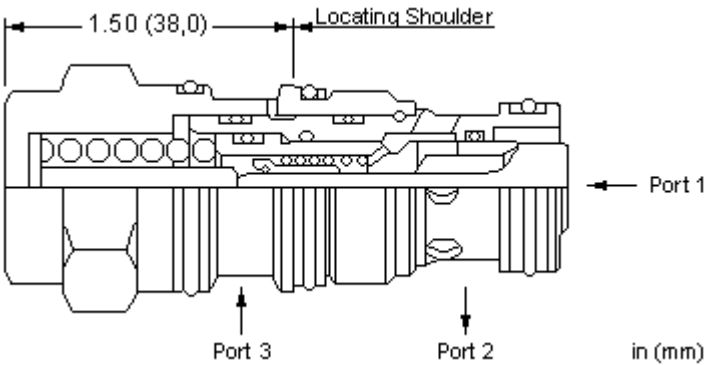

3

CONFIGURATION

X	3500 - 4200 psi (245 - 290 bar)
N	
	Material/Coating

TECHNICAL DATA

NOTE:

	T-2A	DATA
	2	MAY
	80 L/min.	VARY
	4.5:1	BY
	See Technical Features	
	0,3 cc/min.	
	30 cc/min.	
	>85% of setting	
	28,6 mm	
	61 - 68 Nm	
	0.22 kg.	
Seal kit - Cartridge	Buna: 990-202-007	
Seal kit - Cartridge	Polyurethane: 990-002-002	
Seal kit - Cartridge	Viton: 990-202-006	

CONFIGURATION. SEE
CONFIGURATION SECTION.

OPTION SELECTION EXAMPLE: CBDDXXN

(X)		(N)	MATERIAL/COATING
X	3500 - 4200 psi (245 - 290 bar)	N	Standard Material/Coating
M	4700 - 5600 psi (325 - 390 bar)	V	/LH -
V	3200 - 3800 psi (220 - 260 bar)		
Z	4125 - 4900 psi (285 - 340 bar)		

TECHNICAL FEATURES

- M 3600psi 250bar M 5600psi 390bar
- V 2450psi 170bar V 3800psi 260bar
- X 2700psi 190bar X 4200psi 290bar
- Z 3170psi 220bar Z 4900psi 340bar
- “ ”
- ±50psi 3.5bar
- 3
- 2 1+ x
- Sun

PERFORMANCE CURVES

