


3-Port Non-vented, Fixed Setting

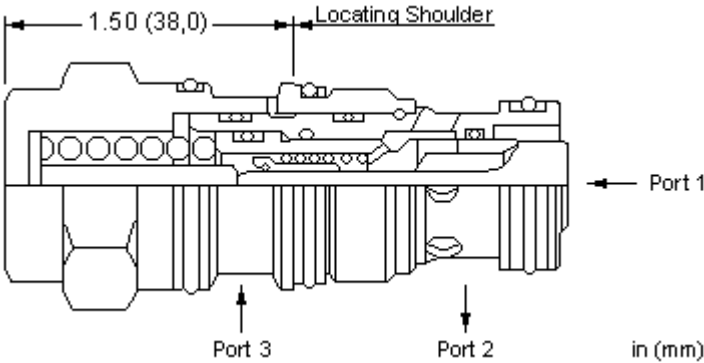

CONFIGURATION

X	3500 - 4200 psi (245 - 290 bar)
N	
Material/Coating	

TECHNICAL DATA

	4.5:1
	270 bar
	350 bar
	0,3 cc/min.
	30 cc/min.
	>85% of setting
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

CONFIGURATION OPTIONS

Model Code Example: CBDGXXN

(X)

(N)

MATERIAL/COATING

X	3500 - 4200 psi (245 - 290 bar)	N		Standard Material/Coating
M	4700 - 5600 psi (325 - 390 bar)	V		/LH -
V	3200 - 3800 psi (220 - 260 bar)			
Z	4125 - 4900 psi (285 - 340 bar)			