



3-Port Non-vented



3-Port Non-vented, Fixed Setting

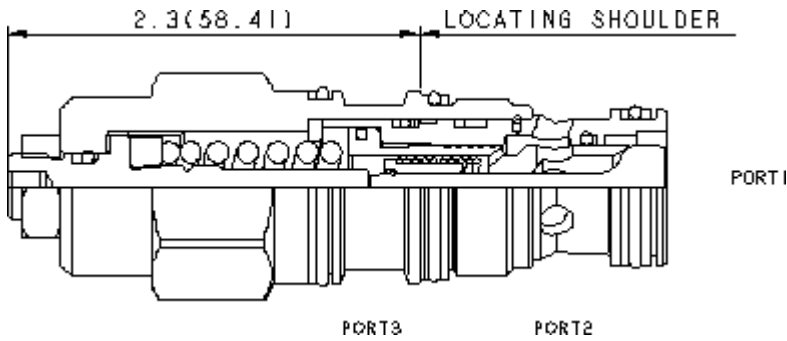

TECHNICAL DATA

Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

CONFIGURATION

CONFIGURATION OPTIONS

Model Code Example: **CBDHLJN**

CONTROL		(L)	FUNCTIONAL SETTING RANGE	(J)	SEAL MATERIAL	(N)	MATERIAL/COATING
L Control		Standard Screw Adjustment					
L Standard Screw Adjustment		ps	J 2000 - 5000 psi w/25 psi Check (140 - 350 bar w/ 1,7 bar Check), 3000 psi (210 bar) Standard Setting		N Buna-N		
J Functional Setting Range		ps	C 2000 - 5000 psi w/4 psi Check (140 - 350 bar w/ 0,3 bar Check), 3000 psi (210 bar) Standard Setting		V Viton		
N Seal Material		Buna-N	D 1000 - 2500 psi w/4 psi Check (70 - 175 bar w/ 0,3 bar Check), 2000 psi (140 bar) Standard Setting		/LH Mild Steel, Zinc-Nickel		
Material/Coating			K 1000 - 2500 psi w/25 psi Check (70 - 175 bar w/ 1,7 bar Check), 2000 psi (140 bar) Standard Setting				