



3-Port Non-vented



3-Port Non-vented, Fixed Setting

CONFIGURATION

L	Control	Standard Screw Adjustment
		2000 - 5000 psi w/25 psi Check
J	Functional Setting	(140 - 350 bar w/ 1,7 bar Check),
	Range	3000 psi (210 bar) Standard Setting
N	Seal Material	Buna-N
	Material/Coating	

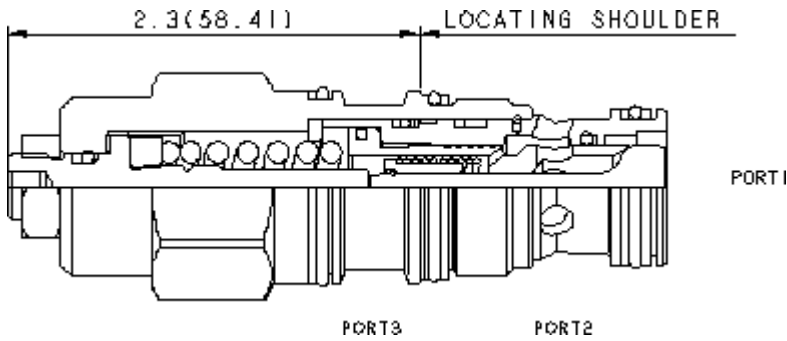

TECHNICAL DATA

NOTE:

cavidad	T-2A	DATA
Series	2	MAY
Capacity	30 L/min.	VARY
Maximum Recommended Load Pressure at Maximum Setting	270 bar	BY
Maximum Setting	350 bar	
Adjustment - No. of CCW Turns from Min. to Max. Setting	3.75	
Factory Pressure Settings Established at	30 cc/min.	
Operating Characteristic	Restrictive	
Valve Hex Size	28,6 mm	
Valve Installation Torque	61 - 68 Nm	
Adjustment Screw Internal Hex Size	4 mm	
Locknut Hex Size	15 mm	
Locknut Torque	9 - 10 Nm	
Model Weight	0.29 kg.	
Seal kit - Cartridge	Buna: 990-202-007	
Seal kit - Cartridge	Polyurethane: 990-002-002	
Seal kit - Cartridge	Viton: 990-202-006	

CONFIGURATION. SEE
CONFIGURATION SECTION.

OPTION SELECTION EXAMPLE: CBDHLJN

CONTROL	(L)	FUNCTIONAL SETTING RANGE	(J)	SEAL MATERIAL	(N)	MATERIAL/COATING
L	Standard Screw Adjustment	J	2000 - 5000 psi w/25 psi Check (140 - 350 bar w/ 1,7 bar Check), 3000 psi (210 bar) Standard Setting	N	Buna-N	Standard Material/Coating
C	Tamper Resistant - Factory Set	C	2000 - 5000 psi w/4 psi Check (140 - 350 bar w/ 0,3 bar Check), 3000 psi (210 bar) Standard Setting	V	Viton	/LH Mild Steel, Zinc-Nickel
		D	1000 - 2500 psi w/4 psi Check (70 - 175 bar w/ 0,3 bar Check), 2000 psi (140 bar) Standard Setting			
		K	1000 - 2500 psi w/25 psi Check (70 - 175 bar w/ 1,7 bar Check), 2000 psi (140 bar) Standard Setting			

PERFORMANCE CURVES

