

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-2A
	2
	80 L/min.
	2.3:1
	270 bar
	350 bar
	0,3 cc/min.
	30 cc/min.
-	3.75
	>85% of setting
	28,6 mm
	61 - 68 Nm
	4 mm
	15 mm
	9 - 10 Nm
	0.29 kg.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

OPTION SELECTION EXAMPLE: CBDLLJN


	(L)	(J)	(N)	MATERIAL/COATING
L		J	N	Standard Material/Coating
		V		/AP
				/LH
		2000 - 5000 psi 25 psi (140 - 350 bar 1.7 bar), 3000 psi (210 bar)		
		400 - 1500 psi 4 psi (28 - 105 bar 0.3 bar), 1000 psi (70 bar)		
		2000 - 5000 psi 4 psi (140 - 350 bar 0.3 bar), 3000 psi (210 bar)		
		1000 - 2500 psi 4 psi (70 - 175 bar 0.3 bar), 2000 psi (140 bar)		
		400 - 1500 psi 25 psi (28 - 105 bar 1.7 bar), 1000 psi (70 bar)		
		1000 - 2500 psi 25 psi (70 - 175 bar 1.7 bar), 2000 psi (140 bar)		

TECHNICAL FEATURES

- 1.3
- 200psi 14bar
- 2 1+ x
- 85%
- Sun
- 4psi 0.3bar
- 3
- Sun

PERFORMANCE CURVES

Free Flow and Piloted Open Pressure Drop

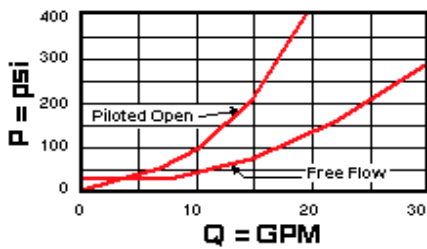

Free Flow and Piloted Open Pressure Drop

