



3-Port Non-vented



3-Port Non-vented, Fixed Setting

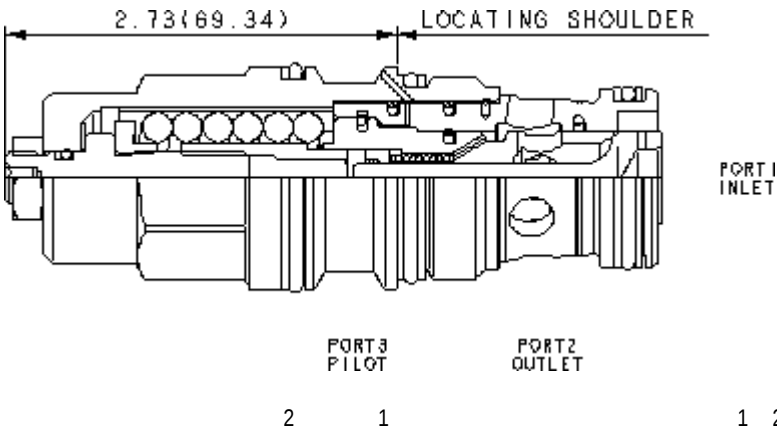

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

|                      |                           |
|----------------------|---------------------------|
|                      | 3:1                       |
|                      | 215 bar                   |
|                      | 280 bar                   |
|                      | 0,3 cc/min.               |
|                      | 30 cc/min.                |
| -                    | 3.75                      |
|                      | >85% of setting           |
|                      | 15 mm                     |
|                      | 9 - 10 Nm                 |
| Seal kit - Cartridge | Buna: 990-017-007         |
| Seal kit - Cartridge | Polyurethane: 990-017-002 |
| Seal kit - Cartridge | Viton: 990-017-006        |
| Seal kit - Cartridge | Buna: 990-017-007         |
| Seal kit - Cartridge | Polyurethane: 990-017-002 |
| Seal kit - Cartridge | Viton: 990-017-006        |

**CONFIGURATION OPTIONS**

**Model Code Example: CBFALHN**

| (L) | (H)                                                                 | (N) | MATERIAL/COATING          |
|-----|---------------------------------------------------------------------|-----|---------------------------|
| L   | H 1000 - 4000 psi 25 psi (70 - 280 bar 1.7 bar), 3000 psi (210 bar) | N   | Standard Material/Coating |
|     | A 1000 - 4000 psi 4 psi (70 - 280 bar 0.3 bar), 3000 psi (210 bar)  | V   | /LH -                     |
|     | B 400 - 1500 psi 4 psi (28 - 105 bar 0.3 bar), 1000 psi (70 bar)    |     |                           |
|     | I 400 - 1500 psi 25 psi (28 - 105 bar 1.7 bar), 1000 psi (70 bar)   |     |                           |