



3-Port Non-vented



3-Port Non-vented, Fixed Setting

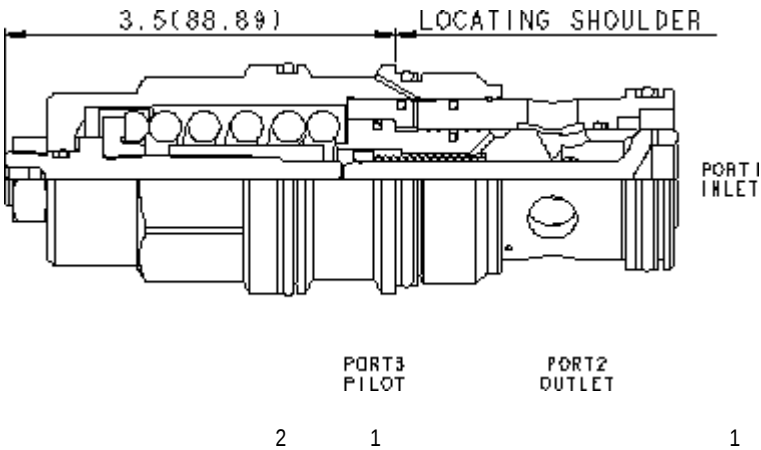

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-19A
	4
	80 L/min.
	4.5:1
	270 bar
	350 bar
	0,3 cc/min.
	30 cc/min.
-	3.75
	>85% of setting
	41,3 mm
	474 - 508 Nm
	5,5 mm
	19,1 mm
	35 - 40 Nm
	1.36 kg.
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006

OPTION SELECTION EXAMPLE: CBHGLJN

(L)		(J)	(N)
L	J	2000 - 5000 psi 25 psi 3000 psi (210 bar)	N
	C	2000 - 5000 psi 4 psi 3000 psi (210 bar)	V
	D	1000 - 2500 psi 4 psi 2000 psi (140 bar)	
	K	1000 - 2500 psi 25 psi 2000 psi (140 bar)	

TECHNICAL FEATURES

- 1.3
-
-
- 200psi 14bar
- 2 1+ x
- 85%
- Sun
- 4psi 0.3bar
-
- 3
- Sun

PERFORMANCE CURVES

