



3-Port Non-vented



3-Port Non-vented, Fixed Setting

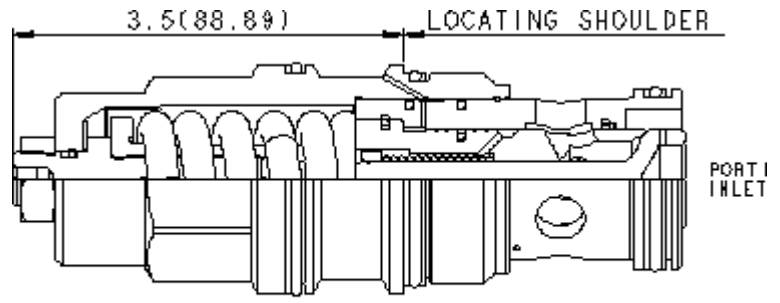

PORT 3  
PILOT

PORT 2  
OUTLET

2 1

1 2 3

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	4.5:1
	270 bar
	350 bar
	0,3 cc/min.
	30 cc/min.
-	3.75
	>85% of setting
	19,1 mm
	35 - 40 Nm
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006

**CONFIGURATION OPTIONS**

**Model Code Example: CBIGLJN**

(L)	(J)	(N)	MATERIAL/COATING
<b>L</b>	<b>J</b> 2000 - 5000 psi 25 psi (140 - bar 1.7 bar), 3000 psi (210 b	<b>N</b>	Standard Material/Coating
	<b>C</b> 2000 - 5000 psi 4 psi (140 - 350 bar 0.3 bar), 3000 psi (210 bar)	<b>V</b>	/AP /LH
	<b>D</b> 1000 - 2500 psi 4 psi (70 - 175 bar 0.3 bar), 2000 psi (140 bar)		