


CONFIGURATION

X	Control	piloto estándar
C	Cracking Pressure	30 psi (2 bar)
N	Seal Material	Buna-N
	Material/Coating	

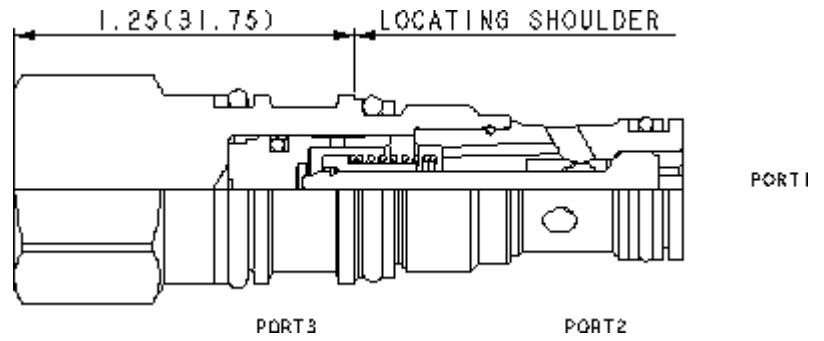

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-163A
Series	0
Capacity	30 L/min.
Maximum Operating Pressure	350 bar
Pilot Ratio	3:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Hex Size	19,1 mm
Valve Installation Torque	27 - 33 Nm
Model Weight	0.09 kg.
Seal kit - Cartridge	Buna: 990-163-007
Seal kit - Cartridge	EPDM: 990-163-014
Seal kit - Cartridge	Polyurethane: 990-163-002
Seal kit - Cartridge	Viton: 990-163-006

OPTION SELECTION EXAMPLE: CKBDXCN

CONTROL	(X)	CRACKING PRESSURE	(C)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
X piloto estándar		C 30 psi (2 bar)		N Buna-N		/LH Mild Steel, Zinc-Nickel	
L Manual Load Release		E 75 psi (5 bar)		E EPDM		/AP Stainless Steel, Passivated	
				V Viton		Standard Material/Coating	

PERFORMANCE CURVES

