


CONFIGURATION

X	Control	piloto estándar
C	Cracking Pressure	30 psi (2 bar)
N	Seal Material	Buna-N
	Material/Coating	

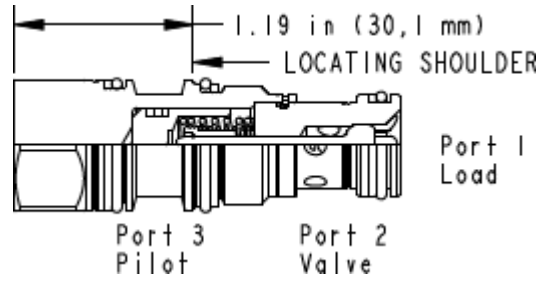

NOTE: DATA MAY VARY FROM TECHNICAL DATA. PLEASE SEE CONFIGURATION SECTION.

TECHNICAL DATA	
cavidad	T-11A
Series	1
Capacity	60 L/min.
Maximum Operating Pressure	350 bar
Pilot Ratio	3:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Model Weight	0.13 kg.
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	EPDM: 990-011-014
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

OPTION SELECTION EXAMPLE: CKCBXCN

CONTROL	(X)	CRACKING PRESSURE	(C)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
X	piloto estándar	C	30 psi (2 bar)	N	Buna-N	/LH	Mild Steel, Zinc-Nickel
B	External 1/4 BSPP Pilot Port, Port 3 blocked	A	4 psi (0,3 bar)	E	EPDM	/AP	Stainless Steel, Passivated
C	Manual Load Release - Tamper Resistant	B	15 psi (1 bar)	V	Viton		Standard Material/Coating
L	Manual Load Release	D	50 psi (3,5 bar)				
		E	75 psi (5 bar)				
		F	100 psi (7 bar)				
		Z	1 psi (0,07 bar)				

PERFORMANCE CURVES

