


## CONFIGURATION

X	Control	piloto estándar
C	Cracking Pressure	30 psi (2 bar)
N	Seal Material	Buna-N
	Material/Coating	

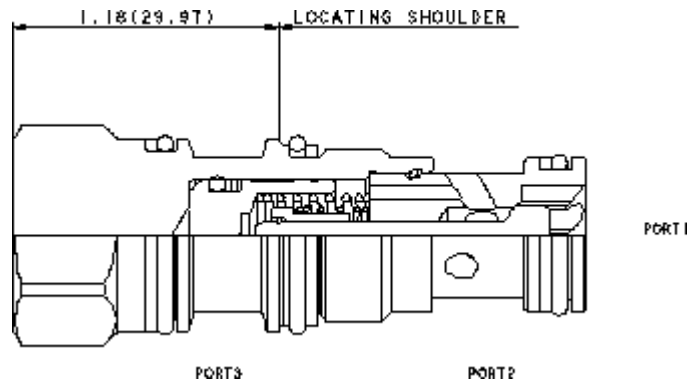

## TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-11A
Series	1
Capacity	60 L/min.
Maximum Operating Pressure	350 bar
Pilot Ratio	3:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Model Weight	0.13 kg.
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	EPDM: 990-011-014
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

## OPTION SELECTION EXAMPLE: CKCDXCN

CONTROL	(X)	CRACKING PRESSURE	(C)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
<b>X</b>	piloto estándar	<b>C</b>	30 psi (2 bar)	<b>N</b>	Buna-N	<b>/LH</b>	Mild Steel, Zinc-Nickel
<b>B</b>	External 1/4 BSPP Pilot Port, Port 3 blocked	<b>A</b>	4 psi (0,3 bar)	<b>E</b>	EPDM	<b>/AP</b>	Stainless Steel, Passivated
<b>L</b>	Manual Load Release	<b>B</b>	15 psi (1 bar)	<b>V</b>	Viton		Standard Material/Coating
		<b>D</b>	50 psi (3,5 bar)				
		<b>E</b>	75 psi (5 bar)				
		<b>F</b>	100 psi (7 bar)				
		<b>G</b>	150 psi (10,5 bar)				
		<b>Z</b>	1 psi (0,07 bar)				

### PERFORMANCE CURVES

