


### CONFIGURATION

X	Control	piloto estándar
C	Cracking Pressure	30 psi (2 bar)
N	Seal Material	Buna-N
	Material/Coating	

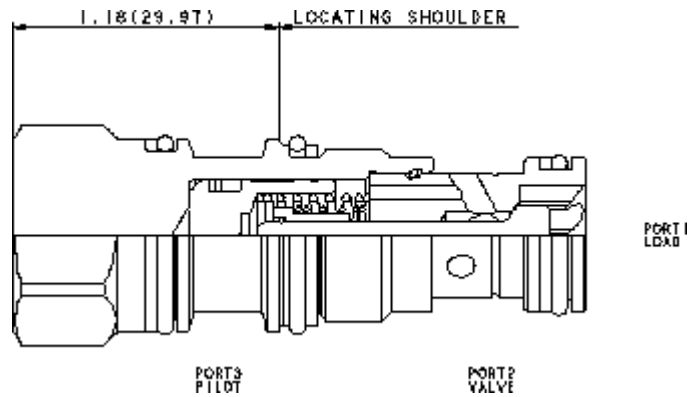

### TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-11A
Series	1
Capacity	60 L/min.
Maximum Operating Pressure	350 bar
Pilot Ratio	5:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Model Weight	0.13 kg.
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

## OPTION SELECTION EXAMPLE: CKCRXCN

CONTROL	(X)	CRACKING PRESSURE	(C)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
<b>X</b> piloto estándar		<b>C</b> 30 psi (2 bar)		<b>N</b> Buna-N		<b>/LH</b> Mild Steel, Zinc-Nickel	
<b>B</b> External 1/4 BSPP Pilot Port, Port 3 blocked		<b>A</b> 4 psi (0,3 bar)		<b>V</b> Viton		<b>/AP</b> Stainless Steel, Passivated	
<b>C</b> Manual Load Release - Tamper Resistant		<b>B</b> 15 psi (1 bar)				Standard Material/Coating	
<b>L</b> Manual Load Release		<b>D</b> 50 psi (3,5 bar)					
		<b>E</b> 75 psi (5 bar)					
		<b>F</b> 100 psi (7 bar)					
		<b>Z</b> 1 psi (0,07 bar)					