


CONFIGURATION

X	Control	piloto estándar
C	Cracking Pressure	30 psi (2 bar)
N	Seal Material	Buna-N

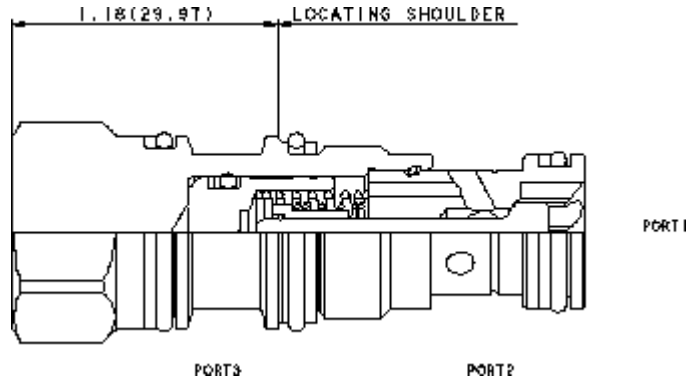

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-11A
Series	1
Capacity	60 L/min.
Maximum Operating Pressure	350 bar
Pilot Ratio	5:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Model Weight	0.13 kg.
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Viton: 990-011-006

OPTION SELECTION EXAMPLE: CKCSXCN

CONTROL	(X) CRACKING PRESSURE	(C) SEAL MATERIAL	(N)
X piloto estándar	C 30 psi (2 bar)	N Buna-N	
B External 1/4 BSPP Pilot Port, Port 3 blocked	A 4 psi (0,3 bar)	V Viton	
C Manual Load Release - Tamper Resistant	B 15 psi (1 bar)		
L Manual Load Release	D 50 psi (3,5 bar)		
P External 1/4 NPTF Port, Port 3 blocked	E 75 psi (5 bar)		
	F 100 psi (7 bar)		
	Z 1 psi (0,07 bar)		

PERFORMANCE CURVES

