


CONFIGURATION

Cracking Pressure

Seal Material

Material/Coating

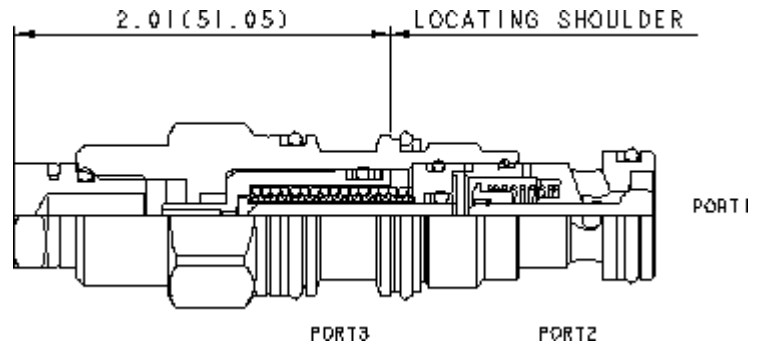

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-11A
Series	1
Capacity	60 L/min.
Maximum Operating Pressure	350 bar
Pilot Ratio	3:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Adjustment Screw Internal Hex Size	3,2 mm
Locknut Hex Size	11,1 mm
Model Weight	0.15 kg.
Seal kit - Cartridge	Buna: 990-311-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-311-006

OPTION SELECTION EXAMPLE: CKCVXCN

CRACKING PRESSURE

(F) SEAL MATERIAL

(V) MATERIAL/COATING

(/LH)

- F** 100 psi (7 bar)
- A 4 psi (0,3 bar)
- B 15 psi (1 bar)
- C 30 psi (2 bar)
- D 50 psi (3,5 bar)
- E 75 psi (5 bar)

- V** Viton
- N Buna-N

- /LH** Mild Steel, Zinc-Nickel
- /AP Stainless Steel, Passivated
- Standard Material/Coating

PERFORMANCE CURVES

