


## CONFIGURATION

<b>L</b>	Control	Manual Load Release
<b>C</b>	Cracking Pressure	30 psi (2 bar)
<b>N</b>	Seal Material	Buna-N
	Material/Coating	

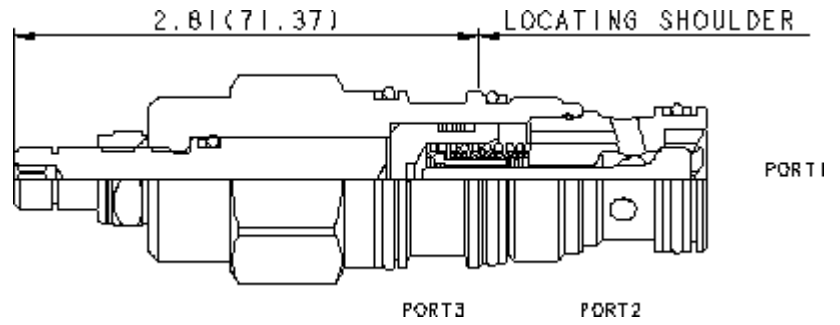

NOTE: DATA MAY VARY FROM TECHNICAL DATA. SEE CONFIGURATION SECTION.

cavidad	T-2A
Series	2
Capacity	120 L/min.
Maximum Operating Pressure	350 bar
Pilot Ratio	3:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Hex Size	28,6 mm
Valve Installation Torque	61 - 68 Nm
Model Weight	0.32 kg.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	EPDM: 990-202-014
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

## OPTION SELECTION EXAMPLE: CKEBLCN

CONTROL	(L)	CRACKING PRESSURE	(C)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
<b>L</b> Manual Load Release		<b>C</b> 30 psi (2 bar)		<b>N</b> Buna-N		<b>/LH</b> Mild Steel, Zinc-Nickel	
X piloto estándar		A 4 psi (0,3 bar)		E EPDM		/AP Stainless Steel, Passivated	
		B 15 psi (1 bar)		V Viton		Standard Material/Coating	
		D 50 psi (3,5 bar)					
		E 75 psi (5 bar)					
		F 100 psi (7 bar)					
		Z 1 psi (0,07 bar)					

### PERFORMANCE CURVES

