




### CONFIGURATION

L	Control	Manual Load Release
A	Cracking Pressure	4 psi (0,3 bar)
N	Seal Material	Buna-N

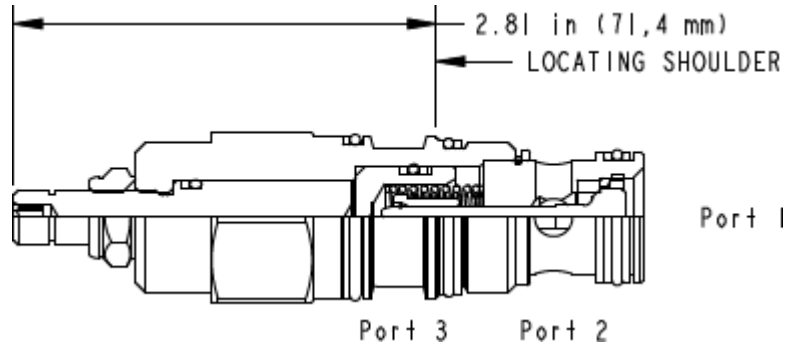

### TECHNICAL DATA

Maximum Operating Pressure	175 bar
Pilot Ratio	3:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

### CONFIGURATION OPTIONS

#### Model Code Example: CKECLAN

CONTROL	(L)	CRACKING PRESSURE	(A)	SEAL MATERIAL	(N)
<b>L</b> Manual Load Release		<b>A</b> 4 psi (0,3 bar)		<b>N</b> Buna-N	
K manilla		F 100 psi (7 bar)		V Viton	
P External 1/4 NPTF Pilot Port, Port 3 Blocked		Z 1 psi (0,07 bar)			
X piloto estándar					