


CONFIGURATION

L	Control	Manual Load Release
A	Cracking Pressure	4 psi (0,3 bar)
N	Seal Material	Buna-N

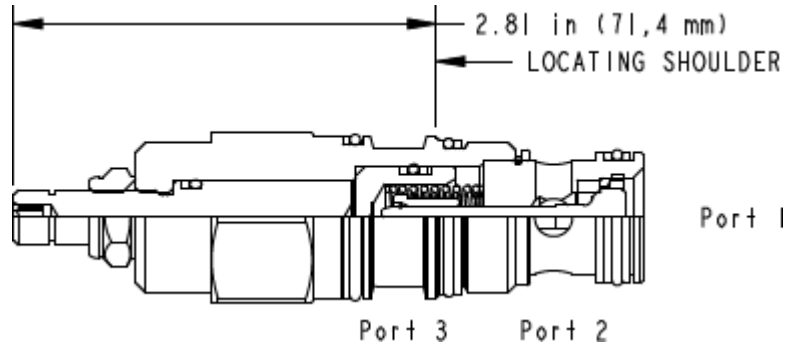

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-2A
Series	2
Capacity	120 L/min.
Maximum Operating Pressure	175 bar
Pilot Ratio	3:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Hex Size	28,6 mm
Valve Installation Torque	61 - 68 Nm
Model Weight	0.31 kg.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

OPTION SELECTION EXAMPLE: CKECLAN

CONTROL

(L)

CRACKING PRESSURE

(A)

SEAL MATERIAL

(N)

- L** Manual Load Release
- K manilla
- P External 1/4 NPTF Pilot Port, Port 3 Blocked
- X piloto estándar

- A** 4 psi (0,3 bar)
- F 100 psi (7 bar)
- Z 1 psi (0,07 bar)

- N** Buna-N
- V Viton

PERFORMANCE CURVES

