


**CONFIGURATION**

<b>P</b> Control	External 1/4 NPTF Pilot Port, Port 3 Blocked
<b>C</b> Cracking Pressure	30 psi (2 bar)
<b>N</b> Seal Material	Buna-N
Material/Coating	

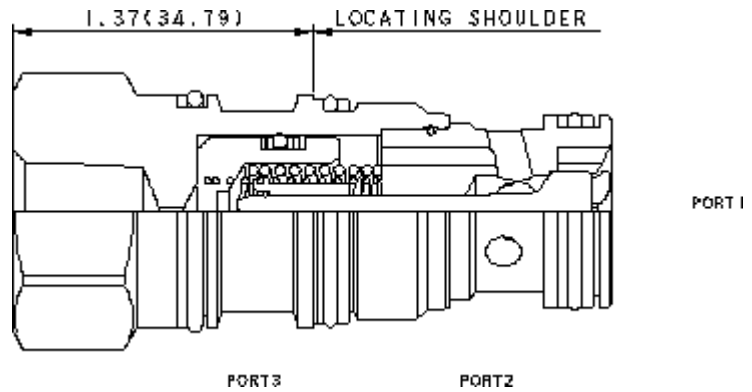

**TECHNICAL DATA**

Maximum Operating Pressure	350 bar
Pilot Ratio	3:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

**CONFIGURATION OPTIONS**

**Model Code Example: CKEDPCN**

CONTROL (P)	CRACKING PRESSURE (C)	SEAL MATERIAL (N)	MATERIAL/COATING (LH)
<b>P</b> External 1/4 NPTF Pilot Port, Port 3 Blocked	<b>C</b> 30 psi (2 bar)	<b>N</b> Buna-N	<b>/LH</b> Mild Steel, Zinc-Nickel
	<b>F</b> 100 psi (7 bar)	<b>V</b> Viton	<b>/AP</b> Stainless Steel, Passivated
	<b>Z</b> 1 psi (0,07 bar)		Standard Material/Coating