




CONFIGURATION

P Control	External 1/4 NPTF Pilot Port, Port 3 Blocked
C Cracking Pressure	30 psi (2 bar)
N Seal Material	Buna-N
Material/Coating	

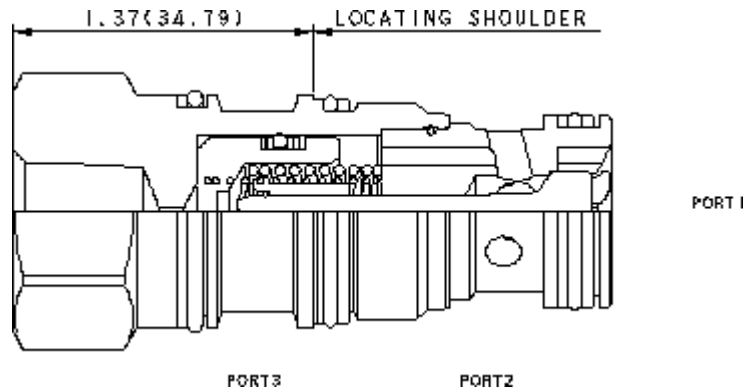

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-2A
Series	2
Capacity	120 L/min.
Maximum Operating Pressure	350 bar
Pilot Ratio	3:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Hex Size	28,6 mm
Valve Installation Torque	61 - 68 Nm
Model Weight	0.23 kg.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

OPTION SELECTION EXAMPLE: CKEDPCN

CONTROL	(P)	CRACKING PRESSURE	(C)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
P External 1/4 NPTF Pilot Port, Port 3 Blocked		C 30 psi (2 bar)		N Buna-N		/LH Mild Steel, Zinc-Nickel	
		F 100 psi (7 bar)		V Viton		/AP Stainless Steel, Passivated	
		Z 1 psi (0,07 bar)				Standard Material/Coating	

PERFORMANCE CURVES

