




CONFIGURATION

P Control	External 1/4 NPTF Pilot Port, Port 3 Blocked
C Cracking Pressure	30 psi (2 bar)
N Seal Material	Buna-N
Material/Coating	

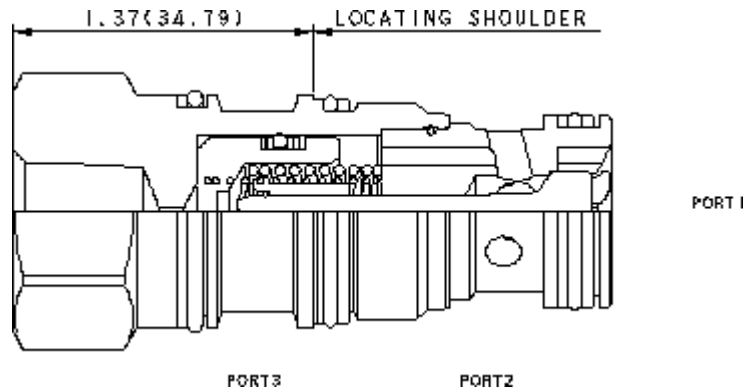

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-2A
Series	2
Capacity	120 L/min.
Maximum Operating Pressure	350 bar
Pilot Ratio	3:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Hex Size	28,6 mm
Valve Installation Torque	61 - 68 Nm
Model Weight	0.23 kg.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

OPTION SELECTION EXAMPLE: CKEDPCN

CONTROL	(P) CRACKING PRESSURE	(C) SEAL MATERIAL	(N) MATERIAL/COATING
P External 1/4 NPTF Pilot Port, Port 3 Blocked L Manual Load Release X piloto estándar	C 30 psi (2 bar) A 4 psi (0,3 bar) B 15 psi (1 bar) D 50 psi (3,5 bar) E 75 psi (5 bar) F 100 psi (7 bar)	N Buna-N V Viton	/LH Mild Steel, Zinc-Nickel /AP Stainless Steel, Passivated Standard Material/Coating

PERFORMANCE CURVES

