


CONFIGURATION

P	1/4 NPTF	3
C	30 psi (2 bar)	
N		
Material/Coating		

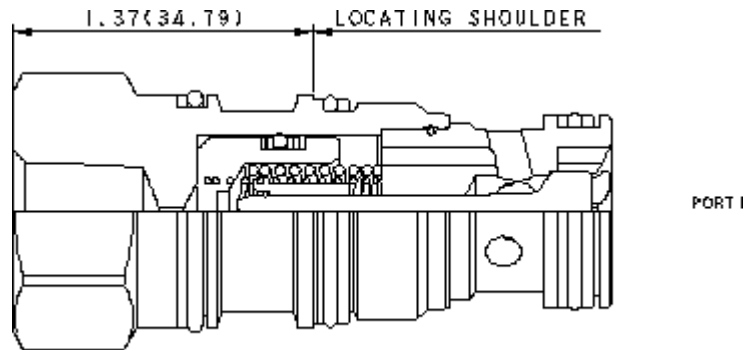

2 1 3 1 2

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-2A
	2
	120 L/min.
	350 bar
	3:1
110 SUS (24 cSt)	0,07 cc/min.
	28,6 mm
	61 - 68 Nm
	0.23 kg.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

OPTION SELECTION EXAMPLE: CKEDPCN

	(P)	(C)	(N)	MATERIAL/COATING	(/LH)
P	1/4 NPTF 3	C 30 psi (2 bar)	N	/LH	-
L		A 4 psi (0,3 bar)	V	/AP	
X		B 15 psi (1 bar)			Standard Material/Coating
		D 50 psi (3,5 bar)			
		E 75 psi (5 bar)			
		F 100 psi (7 bar)			

TECHNICAL FEATURES

- 3 3
-
-
-
-
- 3 E P
-
-
-
- "AP"
- Sun

PERFORMANCE CURVES

