


CONFIGURATION

V 1/4 NPTF 3
C 30 psi (2 bar)
N

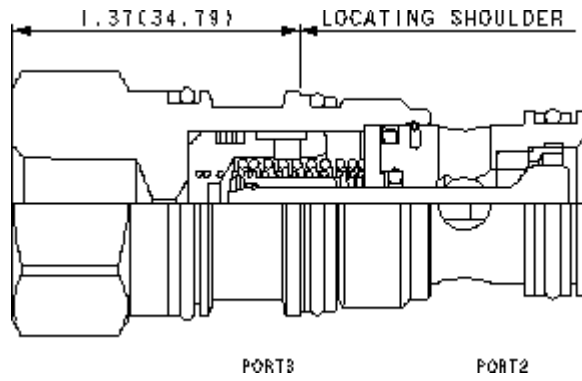

2 1 1 2

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-2A
	2
	120 L/min.
	350 bar
	3:1
110 SUS (24 cSt)	0,07 cc/min.
	28,6 mm
	61 - 68 Nm
	0.22 kg.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

OPTION SELECTION EXAMPLE: CKEHVCN

(V)

(C)

(N)

V 1/4 NPTF 3
S 4-SAE 3

C 30 psi (2 bar)
D 50 psi (3,5 bar)
E 75 psi (5 bar)
F 100 psi (7 bar)

N
V

TECHNICAL FEATURES

- 2 3
-
- CV*V
- 1 2 75%
- 15psi 1bar
-
-
-
-
- / 3
- Sun

PERFORMANCE CURVES

