


CONFIGURATION

Cracking Pressure
Seal Material

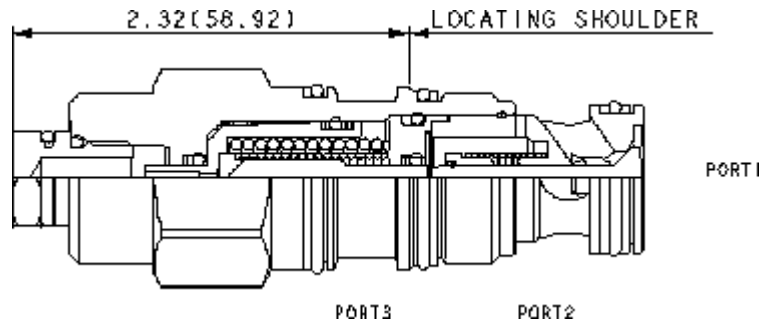

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-2A
Series	2
Capacity	120 L/min.
Maximum Operating Pressure	350 bar
Pilot Ratio	3:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Hex Size	28,6 mm
Valve Installation Torque	61 - 68 Nm
Adjustment Screw Internal Hex Size	3,2 mm
Locknut Hex Size	11,1 mm
Model Weight	0.29 kg.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

OPTION SELECTION EXAMPLE: CKEVXCN

CRACKING PRESSURE

(F) SEAL MATERIAL

(V)

- F** 100 psi (7 bar)
- A 4 psi (0,3 bar)
 - B 15 psi (1 bar)
 - C 30 psi (2 bar)
 - D 50 psi (3,5 bar)
 - E 75 psi (5 bar)

- V** Viton
- N Buna-N

PERFORMANCE CURVES

