




CONFIGURATION

P Control	External 1/4 NPTF Pilot Port, Port 3 Blocked
C Cracking Pressure	30 psi (2 bar)
N Seal Material	Buna-N
Material/Coating	

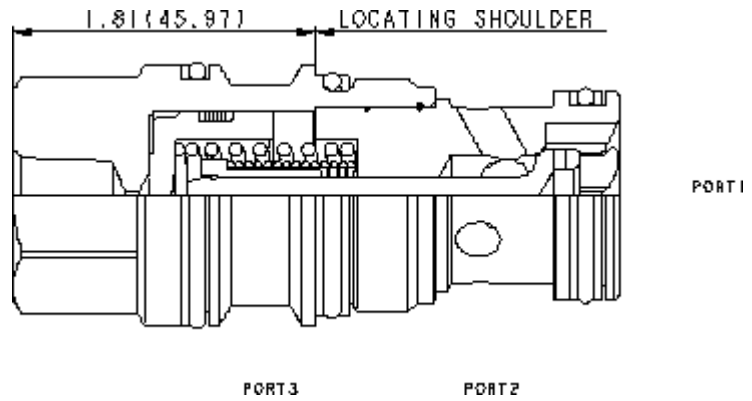

TECHNICAL DATA

Maximum Operating Pressure	350 bar
Pilot Ratio	3:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Seal kit - Cartridge	Buna: 990-017-007
Seal kit - Cartridge	EPDM: 990-017-014
Seal kit - Cartridge	Polyurethane: 990-017-002
Seal kit - Cartridge	Viton: 990-017-006
Seal kit - Cartridge	Buna: 990-017-007
Seal kit - Cartridge	EPDM: 990-017-014
Seal kit - Cartridge	Polyurethane: 990-017-002
Seal kit - Cartridge	Viton: 990-017-006

CONFIGURATION OPTIONS

Model Code Example: CKGBPCN

CONTROL	(P)	CRACKING PRESSURE	(C)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
P External 1/4 NPTF Pilot Port, Port 3 Blocked		C 30 psi (2 bar)		N Buna-N		/LH Mild Steel, Zinc-Nickel	
B External 1/4 BSPP Pilot Port, Port 3 blocked		F 100 psi (7 bar)		E EPDM		/AP Stainless Steel, Passivated	
L Manual Load Release		Z 1 psi (0,07 bar)		V Viton		Standard Material/Coating	
X piloto estándar							