


### CONFIGURATION

<b>P</b> Control	External 1/4 NPTF Pilot Port, Port 3 Blocked
<b>C</b> Cracking Pressure	30 psi (2 bar)
<b>N</b> Seal Material	Buna-N
	Material/Coating

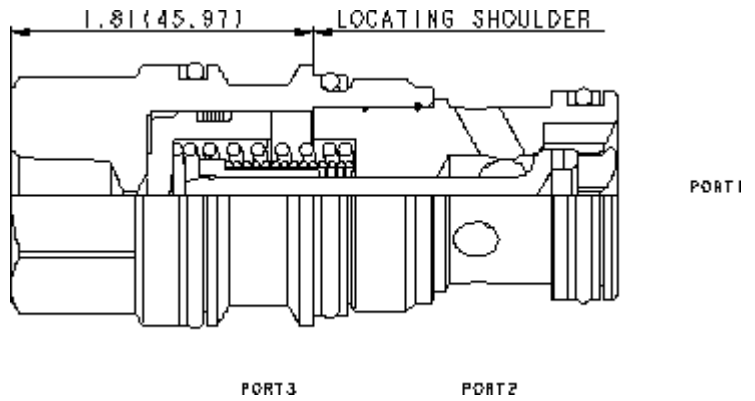

### TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-17A
Series	3
Capacity	240 L/min.
Maximum Operating Pressure	350 bar
Pilot Ratio	3:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Hex Size	31,8 mm
Valve Installation Torque	203 - 217 Nm
Model Weight	0.52 kg.
Seal kit - Cartridge	Buna: 990-017-007
Seal kit - Cartridge	EPDM: 990-017-014
Seal kit - Cartridge	Polyurethane: 990-017-002
Seal kit - Cartridge	Viton: 990-017-006
Seal kit - Cartridge	Buna: 990-017-007
Seal kit - Cartridge	EPDM: 990-017-014
Seal kit - Cartridge	Polyurethane: 990-017-002
Seal kit - Cartridge	Viton: 990-017-006

## OPTION SELECTION EXAMPLE: CKGBPCN

CONTROL	(P)	CRACKING PRESSURE	(C)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
<b>P</b> External 1/4 NPTF Pilot Port, Port 3 Blocked	<b>C</b> 30 psi (2 bar)	<b>N</b> Buna-N	<b>/LH</b> Mild Steel, Zinc-Nickel				
<b>B</b> External 1/4 BSPP Pilot Port, Port 3 blocked	<b>F</b> 100 psi (7 bar)	<b>E</b> EPDM	<b>/AP</b> Stainless Steel, Passivated				
<b>L</b> Manual Load Release	<b>Z</b> 1 psi (0,07 bar)	<b>V</b> Viton	Standard Material/Coating				
<b>X</b> piloto estándar							

### PERFORMANCE CURVES

