


CONFIGURATION

P	1/4 NPTF	3
C	30 psi (2 bar)	
N		
Material/Coating		

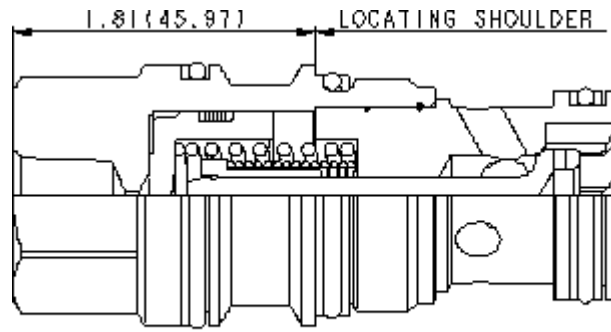

PORT 3 PORT 2 PORT 1

2 1 3 1 2

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-17A
	3
	240 L/min.
	350 bar
	3:1
110 SUS (24 cSt)	0,07 cc/min.
	31,8 mm
	203 - 217 Nm
	0.52 kg.
Seal kit - Cartridge	Buna: 990-017-007
Seal kit - Cartridge	EPDM: 990-017-014
Seal kit - Cartridge	Polyurethane: 990-017-002
Seal kit - Cartridge	Viton: 990-017-006
Seal kit - Cartridge	Buna: 990-017-007
Seal kit - Cartridge	EPDM: 990-017-014
Seal kit - Cartridge	Polyurethane: 990-017-002
Seal kit - Cartridge	Viton: 990-017-006

OPTION SELECTION EXAMPLE: CKGBPCN

	(P)	(C)	(N)	MATERIAL/COATING	(/LH)
P	1/4 NPTF 3	C 30 psi (2 bar)	N	/LH -	
L		A 4 psi (0,3 bar)	E EPDM	/AP	
X		B 15 psi (1 bar)	V	Standard Material/Coating	
		D 50 psi (3,5 bar)			
		E 75 psi (5 bar)			
		F 100 psi (7 bar)			

TECHNICAL FEATURES

- 3 3
-
-
-
-
- 3 E P
-
- EPDM
- "/AP"
- Sun

PERFORMANCE CURVES

