


CONFIGURATION

| | | |
|---|-------------------|-----------------|
| X | Control | piloto estándar |
| C | Cracking Pressure | 30 psi (2 bar) |
| N | Seal Material | Buna-N |
| | Material/Coating | |

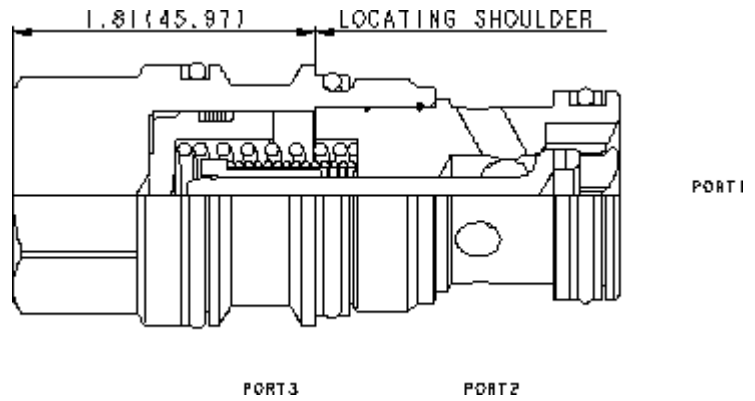

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

| | |
|---|---------------------------|
| cavidad | T-17A |
| Series | 3 |
| Capacity | 240 L/min. |
| Maximum Operating Pressure | 350 bar |
| Pilot Ratio | 3:1 |
| Maximum Valve Leakage at 110 SUS (24 cSt) | 0,07 cc/min. |
| Valve Hex Size | 31,8 mm |
| Valve Installation Torque | 203 - 217 Nm |
| Model Weight | 0.53 kg. |
| Seal kit - Cartridge | Buna: 990-017-007 |
| Seal kit - Cartridge | EPDM: 990-017-014 |
| Seal kit - Cartridge | Polyurethane: 990-017-002 |
| Seal kit - Cartridge | Viton: 990-017-006 |

OPTION SELECTION EXAMPLE: CKGBXCN

| CONTROL | (X) | CRACKING PRESSURE | (C) | SEAL MATERIAL | (N) | MATERIAL/COATING | (/LH) |
|---|-----|---------------------------|-----|-----------------|-----|--|-------|
| X piloto estándar | | C 30 psi (2 bar) | | N Buna-N | | /LH Mild Steel, Zinc-Nickel | |
| B External 1/4 BSPP Pilot Port, Port 3 blocked | | A 4 psi (0,3 bar) | | E EPDM | | /AP Stainless Steel, Passivated | |
| L Manual Load Release | | B 15 psi (1 bar) | | V Viton | | Standard Material/Coating | |
| | | D 50 psi (3,5 bar) | | | | | |
| | | E 75 psi (5 bar) | | | | | |
| | | F 100 psi (7 bar) | | | | | |
| | | Z 1 psi (0,07 bar) | | | | | |

PERFORMANCE CURVES

