


CONFIGURATION

Cracking Pressure

Seal Material

Material/Coating

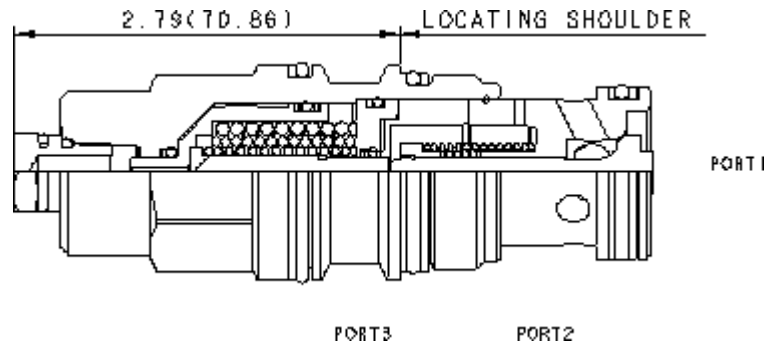

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-17A
Series	3
Capacity	240 L/min.
Maximum Operating Pressure	350 bar
Pilot Ratio	3:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Hex Size	31,8 mm
Valve Installation Torque	203 - 217 Nm
Adjustment Screw Internal Hex Size	3,2 mm
Locknut Hex Size	11,1 mm
Model Weight	0.60 kg.
Seal kit - Cartridge	Buna: 990-017-007
Seal kit - Cartridge	Polyurethane: 990-017-002
Seal kit - Cartridge	Viton: 990-017-006

OPTION SELECTION EXAMPLE: CKGVXCN

CRACKING PRESSURE

(F) SEAL MATERIAL

(V) MATERIAL/COATING

- F** 100 psi (7 bar)
- A 4 psi (0,3 bar)
- B 15 psi (1 bar)
- C 30 psi (2 bar)
- D 50 psi (3,5 bar)
- E 75 psi (5 bar)

- V** Viton
- N Buna-N

- Standard Material/Coating
- /AP** Stainless Steel, Passivated

PERFORMANCE CURVES

