




CONFIGURATION

| | | |
|---|-------------------|-----------------|
| X | Control | piloto estándar |
| C | Cracking Pressure | 30 psi (2 bar) |
| N | Seal Material | Buna-N |
| | Material/Coating | |

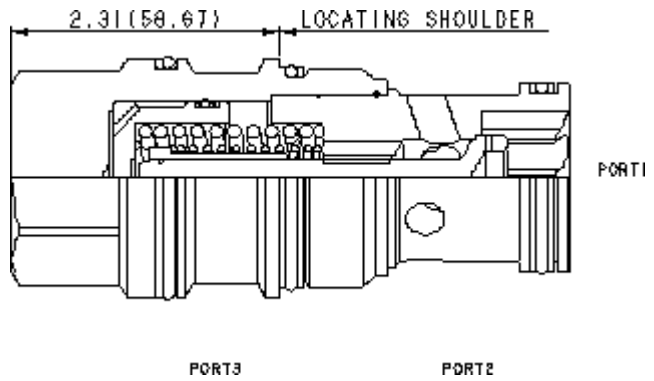

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

| | |
|---|---------------------------|
| cavidad | T-19A |
| Series | 4 |
| Capacity | 480 L/min. |
| Maximum Operating Pressure | 350 bar |
| Pilot Ratio | 3:1 |
| Maximum Valve Leakage at 110 SUS (24 cSt) | 0,07 cc/min. |
| Valve Hex Size | 41,3 mm |
| Valve Installation Torque | 474 - 508 Nm |
| Model Weight | 1.20 kg. |
| Seal kit - Cartridge | Buna: 990-019-007 |
| Seal kit - Cartridge | Polyurethane: 990-019-002 |
| Seal kit - Cartridge | Viton: 990-019-006 |

OPTION SELECTION EXAMPLE: CKIDXCN

| CONTROL | (X) | CRACKING PRESSURE | (C) | SEAL MATERIAL | (N) | MATERIAL/COATING | (/LH) |
|--------------------------|-----|-------------------------|-----|-----------------|-----|------------------------------------|-------|
| X piloto estándar | | C 30 psi (2 bar) | | N Buna-N | | /LH Mild Steel, Zinc-Nickel | |
| L Manual Load Release | | A 4 psi (0,3 bar) | | V Viton | | /AP Stainless Steel, Passivated | |
| | | B 15 psi (1 bar) | | | | Standard Material/Coating | |
| | | D 50 psi (3,5 bar) | | | | | |
| | | E 75 psi (5 bar) | | | | | |
| | | F 100 psi (7 bar) | | | | | |
| | | Z 1 psi (0,07 bar) | | | | | |

PERFORMANCE CURVES

