


### CONFIGURATION

Cracking Pressure

Seal Material

Material/Coating

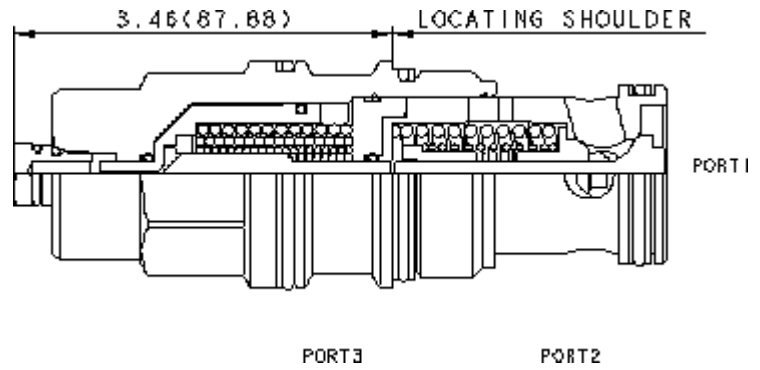

### TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-19A
Series	4
Capacity	480 L/min.
Maximum Operating Pressure	350 bar
Pilot Ratio	3:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Hex Size	41,3 mm
Valve Installation Torque	474 - 508 Nm
Adjustment Screw Internal Hex Size	3,2 mm
Locknut Hex Size	11,1 mm
Model Weight	1.35 kg.
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006

## OPTION SELECTION EXAMPLE: CKIVXCN

**CRACKING PRESSURE**

(F)

**SEAL MATERIAL**

(V)

**MATERIAL/COATING**

(/LH)

- F** 100 psi (7 bar)
- A 4 psi (0,3 bar)
- B 15 psi (1 bar)
- C 30 psi (2 bar)
- D 50 psi (3,5 bar)
- E 75 psi (5 bar)

- V** Viton
- N Buna-N

- /LH** Mild Steel, Zinc-Nickel
- /AP Stainless Steel, Passivated  
Standard Material/Coating

**PERFORMANCE CURVES**

