


CONFIGURATION

X	
C	30psi 2 bar .016 - .062 in. (0,4 - 1,6 mm)
N	
	Material/Coating

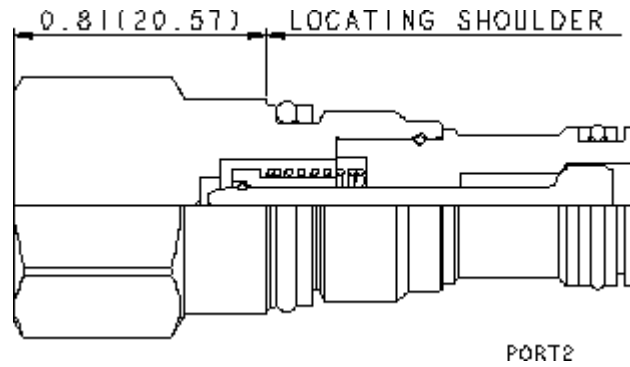

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-162A
	0
	30 L/min.
	350 bar
	0,4 - 1,6 mm
	19,1 mm
	27 - 33 Nm
	0.08 kg.
Seal kit - Cartridge	Buna: 990-162-007
Seal kit - Cartridge	Polyurethane: 990-162-002
Seal kit - Cartridge	Viton: 990-162-006

OPTION SELECTION EXAMPLE: CNACXCN

	(X)	(C)	(N)	MATERIAL/COATING	(/LH)
X	C	30psi 2 bar .016 - .062 in. (0.4 - 1.6 mm)	N	/LH	-
	A	4 psi 0.3 bar .016 - .062 in. (0.4 - 1.6 mm)	V	/AP	Standard Material/Coating
	E	75 psi 5 bar .016 - .062 in. (0.4 - 1.6 mm)			

TECHNICAL FEATURES

-
- 2
- SUN
- 1 2
-
-
- Sun

PERFORMANCE CURVES

