

1 2

2 1

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-13A
	1
	60 L/min.
	350 bar
	0,4 - 2,7 mm
	22,2 mm
	41 - 47 Nm
Seal kit - Cartridge	Buna: 990-010-007
Seal kit - Cartridge	Polyurethane: 990-010-002
Seal kit - Cartridge	Viton: 990-010-006
Seal kit - Cartridge	Buna: 990-010-007
Seal kit - Cartridge	Polyurethane: 990-010-002
Seal kit - Cartridge	Viton: 990-010-006


# OPTION SELECTION EXAMPLE: CNDCXCN

	(X)	(C)	(N)	MATERIAL/COATING
<b>X</b>	<b>C</b>	30psi 2 bar .016 - .107 in. (0.4 - 2.7 mm)	<b>N</b>	Standard Material/Coating
	<b>A</b>	4 psi 0.3 bar .016 - .107 in. (0.4 - 2.7 mm)	<b>V</b>	/AP
	<b>B</b>	15psi 1 bar .016 - .107 in. (0.4 - 2.7 mm)		/LH -
	<b>D</b>	50 psi 3.5 bar .016 - .107 in. (0.4 - 2.7 mm)		
	<b>E</b>	75 psi 5 bar .016 - .107 in. (0.4 - 2.7 mm)		
	<b>F</b>	100 psi 7bar .016 - .107 in. (0.4 - 2.7 mm)		

## TECHNICAL FEATURES

- 
- 1 2 5000psi 350bar
- 2 1
- 
- 
- "AP"
- Sun

## PERFORMANCE CURVES

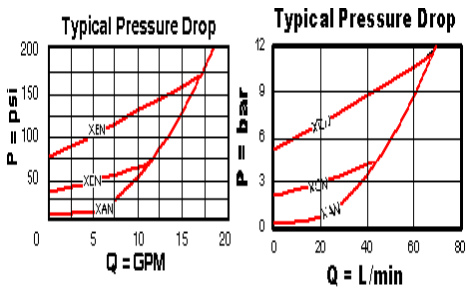

Note: Performance data shown reflects a blocked orifice.