


**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-2A
Series	2
Capacity	120 L/min.
Maximum Operating Pressure	350 bar
Pilot Ratio	3:1
Orifice Range	0,4 - 3,4 mm
Valve Hex Size	28,6 mm
Valve Installation Torque	61 - 68 Nm
Model Weight	0.24 kg.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

# OPTION SELECTION EXAMPLE: CNEEXCN

CONTROL	(X) SETTING RANGE	(C) SEAL MATERIAL	(N)
X Not Adjustable	<b>C</b> 30 psi (2 bar) Cracking Pressure, .016 - .135 in. (0,4 - 3,4 mm) <b>A</b> 4 psi (0,3 bar) Cracking Pressure, .016 - .135 in. (0,4 - 3,4 mm) <b>B</b> 15 psi (1 bar) Cracking Pressure, .016 - .135 in. (0,4 - 3,4 mm) <b>D</b> 50 psi (3,5 bar) Cracking Pressure, .016 - .135 in. (0,4 - 3,4 mm) <b>E</b> 75 psi (5 bar) Cracking Pressure, .016 - .135 in. (0,4 - 3,4 mm) <b>F</b> 100 psi (7 bar) Cracking Pressure, .016 - .135 in. (0,4 - 3,4 mm)	<b>N</b> Buna-N <b>V</b> Viton	

## PERFORMANCE CURVES

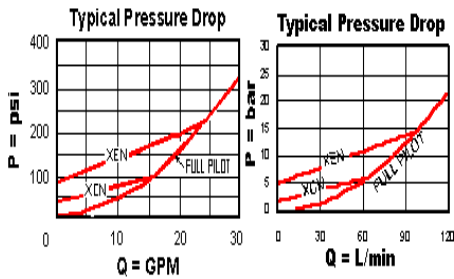

Note: Performance data shown reflects a blocked orifice.