

Free-flow, nose-to-side check valves with a bypass orifice allow free flow from port 1 to port 2. A customer specified orifice is included to restrict flow from port 2 to port 1. See technical data below for orifice range.

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-5A
Series	2
Capacity	30 gpm
Maximum Operating Pressure	5000 psi
Orifice Range	.016 - .127 in.
Valve Hex Size	1 1/8 in.
Valve Installation Torque	45 - 50 lbf ft
Seal kit - Cartridge	Buna: 990-203-007
Seal kit - Cartridge	Viton: 990-203-006


## OPTION SELECTION EXAMPLE: CNFCXCN

CONTROL	(X)	SETTING RANGE	(C)	SEAL MATERIAL	(N)	MATERIAL/COATING
<b>X</b> Not Adjustable		<b>C</b> 30 psi (2 bar) Cracking Pressure, .016 - .127 in. (0,4 - 3,2 mm)		<b>N</b> Buna-N		Standard Material/Coating
		<b>A</b> 4 psi (0,3 bar) Cracking Pressure, .016 - .127 in. (0,4 - 3,2 mm)		<b>V</b> Viton		<b>/AP</b> Stainless Steel, Passivated
		<b>B</b> 15 psi (1 bar) Cracking Pressure, .016 - .127 in. (0,4 - 3,2 mm)				<b>/LH</b> Mild Steel, Zinc-Nickel
		<b>D</b> 50 psi (3,5 bar) Cracking Pressure, .016 - .127 in. (0,4 - 3,2 mm)				
		<b>E</b> 75 psi (5 bar) Cracking Pressure, .016 - .127 in. (0,4 - 3,2 mm)				
		<b>F</b> 100 psi (7 bar) Cracking Pressure, .016 - .127 in. (0,4 - 3,2 mm)				

### TECHNICAL FEATURES

- Two-port check valves share the same cavity for a given frame size, however, pay close attention as flow paths may be in opposite directions.
- Will accept 5000 psi (350 bar) at ports 1 and 2.
- Valves with the opposite flow path (free flow from 2 to 1) are considered flow controls and may be found listed as fixed orifice, non-pressure compensated flow control valve with reverse flow check.
- The customer specified orifice diameter is stamped on one of the cartridge's hex faces.
- Corrosion resistant cartridge valves are intended for use in corrosive environments and are identified by the model code suffix /AP or /LH (see CONFIGURATION section). For further details, please see the Materials of Construction page.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

### PERFORMANCE CURVES

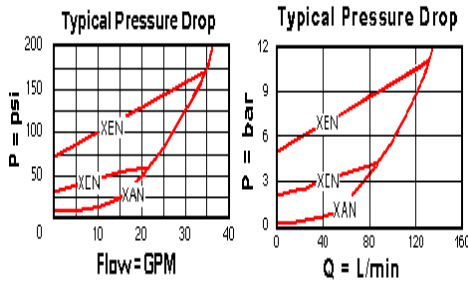

Note: Performance data shown reflects a blocked orifice.